

---

# Python Tree Data

*Release 2.4.3*

**c0fec0de**

**Dec 13, 2017**



---

## Contents

---

|          |                                  |           |
|----------|----------------------------------|-----------|
| <b>1</b> | <b>Installation</b>              | <b>3</b>  |
| <b>2</b> | <b>Introduction</b>              | <b>5</b>  |
| 2.1      | Overview . . . . .               | 5         |
| 2.2      | Basics . . . . .                 | 6         |
| 2.3      | Detach/Attach Protocol . . . . . | 7         |
| 2.4      | Custom Separator . . . . .       | 8         |
| <b>3</b> | <b>API</b>                       | <b>9</b>  |
| 3.1      | Node Classes . . . . .           | 9         |
| 3.2      | Tree Iteration . . . . .         | 15        |
| 3.3      | Tree Rendering . . . . .         | 19        |
| 3.4      | Searching . . . . .              | 23        |
| 3.5      | Node Resolution . . . . .        | 26        |
| 3.6      | Tree Walking . . . . .           | 28        |
| <b>4</b> | <b>Importer</b>                  | <b>31</b> |
| 4.1      | Dictionary Importer . . . . .    | 31        |
| 4.2      | JSON Importer . . . . .          | 32        |
| <b>5</b> | <b>Exporter</b>                  | <b>33</b> |
| 5.1      | Dictionary Exporter . . . . .    | 33        |
| 5.2      | JSON Exporter . . . . .          | 34        |
| 5.3      | Dot Exporter . . . . .           | 35        |
| <b>6</b> | <b>Tricks</b>                    | <b>39</b> |
| 6.1      | Read-only Tree . . . . .         | 39        |
| 6.2      | YAML Import/Export . . . . .     | 41        |
| <b>7</b> | <b>Getting started</b>           | <b>45</b> |
|          | <b>Python Module Index</b>       | <b>49</b> |



Simple, lightweight and extensible [Tree](#) data structure.

Feel free to [share](#) infos about your anytree project.



# CHAPTER 1

---

## Installation

---

To install the *anytree* module run:

```
pip install anytree
```

If you do not have write-permissions to the python installation, try:

```
pip install anytree --user
```





## 2.1 Overview

*anytree* is splitted into the following parts:

### Node Classes

- *Node*: a simple tree node with at least a name attribute and any number of additional attributes.
- *AnyNode*: a generic tree node and any number of additional attributes.
- *NodeMixin*: extends any python class to a tree node.

### Node Resolution

- *Resolver*: retrieve node via absolute or relative path.
- *Walker*: walk from one node to an other.

### Tree Iteration Strategies

- *PreOrderIter*: iterate over tree using pre-order strategy
- *PostOrderIter*: iterate over tree using post-order strategy
- *LevelOrderIter*: iterate over tree using level-order strategy
- *LevelOrderGroupIter*: iterate over tree using level-order strategy returning group for every level
- *ZigZagGroupIter*: iterate over tree using level-order strategy returning group for every level

### Tree Rendering

- ***RenderTree*** using the following styles:
  - *AsciiStyle*
  - *ContStyle*
  - *ContRoundStyle*
  - *DoubleStyle*

## 2.2 Basics

The only tree relevant information is the *parent* attribute. If *None* the node is root node. If set to another node, the node becomes the child of it.

```
>>> from anytree import Node, RenderTree
>>> udo = Node("Udo")
>>> marc = Node("Marc")
>>> lian = Node("Lian", parent=marc)
>>> print(RenderTree(udo))
Node('/Udo')
>>> print(RenderTree(marc))
Node('/Marc')
- Node('/Marc/Lian')
```

Every node has an *children* attribute with a tuple of all children:

```
>>> udo.children
()
>>> marc.children
(Node('/Marc/Lian'),)
>>> lian.children
()
```

### Single Node Attach

```
>>> marc.parent = udo
>>> print(RenderTree(udo))
Node('/Udo')
- Node('/Udo/Marc')
  - Node('/Udo/Marc/Lian')
```

### Single Node Detach

To make a node to a root node, just set this attribute to *None*.

```
>>> marc.is_root
False
>>> marc.parent = None
>>> marc.is_root
True
```

### Modify Multiple Child Nodes

```
>>> n = Node("n")
>>> a = Node("a", parent=n)
>>> b = Node("b", parent=n)
>>> c = Node("c", parent=n)
>>> d = Node("d")
>>> n.children
(Node('/n/a'), Node('/n/b'), Node('/n/c'))
```

Modifying the children attribute modifies multiple child nodes. It can be set to any iterable.

```
>>> n.children = [a, b]
>>> n.children
(Node('/n/a'), Node('/n/b'))
```

Node *c* is removed from the tree. In case of an existing reference, the node *c* does not vanish and is the root of its own tree.

```
>>> c
Node('/c')
```

Adding works likewise.

```
>>> d
Node('/d')
>>> n.children = [a, b, d]
>>> n.children
(Node('/n/a'), Node('/n/b'), Node('/n/d'))
>>> d
Node('/n/d')
```

## 2.3 Detach/Attach Protocol

A node class implementation might implement the notification slots `_pre_detach(parent)`, `_post_detach(parent)`, `_pre_attach(parent)`, `_post_attach(parent)`.

These methods are *protected* methods, intended to be overwritten by child classes of `NodeMixin/Node`. They are called on modifications of a nodes *parent* attribute. Never call them directly from API. This will corrupt the logic behind these methods.

```
>>> class NotifiedNode(Node):
...     def _pre_detach(self, parent):
...         print("_pre_detach", parent)
...     def _post_detach(self, parent):
...         print("_post_detach", parent)
...     def _pre_attach(self, parent):
...         print("_pre_attach", parent)
...     def _post_attach(self, parent):
...         print("_post_attach", parent)
```

Notification on attach:

```
>>> a = NotifiedNode("a")
>>> b = NotifiedNode("b")
>>> c = NotifiedNode("c")
>>> c.parent = a
_pre_attach NotifiedNode('/a')
_post_attach NotifiedNode('/a')
```

Notification on change:

```
>>> c.parent = b
_pre_detach NotifiedNode('/a')
_post_detach NotifiedNode('/a')
_pre_attach NotifiedNode('/b')
_post_attach NotifiedNode('/b')
```

If the parent equals the old value, the notification is not triggered:

```
>>> c.parent = b
```

Notification on detach:

```
>>> c.parent = None
_pre_detach NotifiedNode('/b')
_post_detach NotifiedNode('/b')
```

---

**Important:** An exception raised by `_pre_detach(parent)` and `_pre_attach(parent)` will **prevent** the tree structure to be updated. The node keeps the old state. An exception raised by `_post_detach(parent)` and `_post_attach(parent)` does **not rollback** the tree structure modification.

---

## 2.4 Custom Separator

By default a slash character (/) separates nodes. This separator can be overwritten:

```
>>> class MyNode(Node):
...     separator = "|"
```

```
>>> udo = MyNode("Udo")
>>> dan = MyNode("Dan", parent=udo)
>>> marc = MyNode("Marc", parent=udo)
>>> print(RenderTree(udo))
MyNode(' | Udo')
- MyNode(' | Udo | Dan')
- MyNode(' | Udo | Marc')
```

The resolver takes the custom separator also into account:

```
>>> from anytree import Resolver
>>> r = Resolver()
>>> r.glob(udo, "|Udo|*")
[MyNode(' | Udo | Dan'), MyNode(' | Udo | Marc')]
```

## 3.1 Node Classes

Node Classes.

- *AnyNode*: a generic tree node with any number of attributes.
- *Node*: a simple tree node with at least a name attribute and any number of additional attributes.
- *NodeMixin*: extends any python class to a tree node.

**class** anytree.node.anynode.**AnyNode** (*parent=None, \*\*kwargs*)  
Bases: *anytree.node.nodemixin.NodeMixin, object*

A generic tree node with any *kwargs*.

```
>>> from anytree import AnyNode, RenderTree
>>> root = AnyNode(id="root")
>>> s0 = AnyNode(id="sub0", parent=root)
>>> s0b = AnyNode(id="sub0B", parent=s0, foo=4, bar=109)
>>> s0a = AnyNode(id="sub0A", parent=s0)
>>> s1 = AnyNode(id="sub1", parent=root)
>>> s1a = AnyNode(id="sub1A", parent=s1)
>>> s1b = AnyNode(id="sub1B", parent=s1, bar=8)
>>> s1c = AnyNode(id="sub1C", parent=s1)
>>> s1ca = AnyNode(id="sub1Ca", parent=s1c)
```

```
>>> root
AnyNode(id='root')
>>> s0
AnyNode(id='sub0')
>>> print(RenderTree(root))
AnyNode(id='root')
- AnyNode(id='sub0')
|   - AnyNode(bar=109, foo=4, id='sub0B')
|   - AnyNode(id='sub0A')
```

```
- AnyNode(id='sub1')
  - AnyNode(id='sub1A')
  - AnyNode(bar=8, id='sub1B')
  - AnyNode(id='sub1C')
    - AnyNode(id='sub1Ca')
```

**class** `anytree.node.node.Node`(*name*, *parent=None*, *\*\*kwargs*)  
Bases: `anytree.node.nodemixin.NodeMixin`, `object`

A simple tree node with a *name* and any *kwargs*.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0, foo=4, bar=109)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
>>> s1a = Node("sub1A", parent=s1)
>>> s1b = Node("sub1B", parent=s1, bar=8)
>>> s1c = Node("sub1C", parent=s1)
>>> s1ca = Node("sub1Ca", parent=s1c)
```

```
>>> print(RenderTree(root))
Node('/root')
- Node('/root/sub0')
|   - Node('/root/sub0/sub0B', bar=109, foo=4)
|   - Node('/root/sub0/sub0A')
- Node('/root/sub1')
  - Node('/root/sub1/sub1A')
  - Node('/root/sub1/sub1B', bar=8)
  - Node('/root/sub1/sub1C')
    - Node('/root/sub1/sub1C/sub1Ca')
```

**class** `anytree.node.nodemixin.NodeMixin`  
Bases: `object`

**separator** = '/'

The `NodeMixin` class extends any Python class to a tree node.

The only tree relevant information is the *parent* attribute. If *None* the `NodeMixin` is root node. If set to another node, the `NodeMixin` becomes the child of it.

```
>>> from anytree import NodeMixin, RenderTree
>>> class MyBaseClass(object):
...     foo = 4
>>> class MyClass(MyBaseClass, NodeMixin): # Add Node feature
...     def __init__(self, name, length, width, parent=None):
...         super(MyClass, self).__init__()
...         self.name = name
...         self.length = length
...         self.width = width
...         self.parent = parent
```

```
>>> my0 = MyClass('my0', 0, 0)
>>> my1 = MyClass('my1', 1, 0, parent=my0)
>>> my2 = MyClass('my2', 0, 2, parent=my0)
```

```
>>> for pre, _, node in RenderTree(my0):
...     treestr = u"%s%s" % (pre, node.name)
...     print(treestr.ljust(8), node.length, node.width)
my0      0 0
- my1    1 0
- my2    0 2
```

**parent**

Parent Node.

On set, the node is detached from any previous parent node and attached to the new node.

```
>>> from anytree import Node, RenderTree
>>> udo = Node("Udo")
>>> marc = Node("Marc")
>>> lian = Node("Lian", parent=marc)
>>> print(RenderTree(udo))
Node('/Udo')
>>> print(RenderTree(marc))
Node('/Marc')
- Node('/Marc/Lian')
```

**Attach**

```
>>> marc.parent = udo
>>> print(RenderTree(udo))
Node('/Udo')
- Node('/Udo/Marc')
  - Node('/Udo/Marc/Lian')
```

**Detach**

To make a node to a root node, just set this attribute to *None*.

```
>>> marc.is_root
False
>>> marc.parent = None
>>> marc.is_root
True
```

**children**

All child nodes.

```
>>> from anytree import Node
>>> n = Node("n")
>>> a = Node("a", parent=n)
>>> b = Node("b", parent=n)
>>> c = Node("c", parent=n)
>>> n.children
(Node('/n/a'), Node('/n/b'), Node('/n/c'))
```

Modifying the children attribute modifies the tree.

**Detach**

The children attribute can be updated by setting to an iterable.

```
>>> n.children = [a, b]
>>> n.children
(Node('/n/a'), Node('/n/b'))
```

Node *c* is removed from the tree. In case of an existing reference, the node *c* does not vanish and is the root of its own tree.

```
>>> c
Node('/c')
```

### Attach

```
>>> d = Node("d")
>>> d
Node('/d')
>>> n.children = [a, b, d]
>>> n.children
(Node('/n/a'), Node('/n/b'), Node('/n/d'))
>>> d
Node('/n/d')
```

### Duplicate

A node can just be the children once. Duplicates cause a *TreeError*:

```
>>> n.children = [a, b, d, a]
Traceback (most recent call last):
...
anytree.node.exceptions.TreeError: Cannot add node Node('/n/a') multiple_
↳times as child.
```

### path

Path of this *Node*.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.path
(Node('/Udo'),)
>>> marc.path
(Node('/Udo'), Node('/Udo/Marc'))
>>> lian.path
(Node('/Udo'), Node('/Udo/Marc'), Node('/Udo/Marc/Lian'))
```

### ancestors

All parent nodes and their parent nodes.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.ancestors
()
>>> marc.ancestors
(Node('/Udo'),)
>>> lian.ancestors
(Node('/Udo'), Node('/Udo/Marc'))
```



**ancestors**

All parent nodes and their parent nodes - see [ancestors](#).

The attribute *ancestors* is just a typo of *ancestors*. Please use *ancestors*. This attribute will be removed in the 2.0.0 release.

**descendants**

All child nodes and all their child nodes.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> loui = Node("Loui", parent=marc)
>>> soe = Node("Soe", parent=lian)
>>> udo.descendants
(Node('/Udo/Marc'), Node('/Udo/Marc/Lian'), Node('/Udo/Marc/Lian/Soe'), Node(
↳ '/Udo/Marc/Loui'))
>>> marc.descendants
(Node('/Udo/Marc/Lian'), Node('/Udo/Marc/Lian/Soe'), Node('/Udo/Marc/Loui'))
>>> lian.descendants
(Node('/Udo/Marc/Lian/Soe'),)
```

**root**

Tree Root Node.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.root
Node('/Udo')
>>> marc.root
Node('/Udo')
>>> lian.root
Node('/Udo')
```

**siblings**

Tuple of nodes with the same parent.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> loui = Node("Loui", parent=marc)
>>> lazy = Node("Lazy", parent=marc)
>>> udo.siblings
()
>>> marc.siblings
()
>>> lian.siblings
(Node('/Udo/Marc/Loui'), Node('/Udo/Marc/Lazy'))
>>> loui.siblings
(Node('/Udo/Marc/Lian'), Node('/Udo/Marc/Lazy'))
```

**is\_leaf**

*Node* has no children (External Node).

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.is_leaf
False
>>> marc.is_leaf
False
>>> lian.is_leaf
True
```

**is\_root**

*Node* is tree root.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.is_root
True
>>> marc.is_root
False
>>> lian.is_root
False
```

**height**

Number of edges on the longest path to a leaf *Node*.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.height
2
>>> marc.height
1
>>> lian.height
0
```

**depth**

Number of edges to the root *Node*.

```
>>> from anytree import Node
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> udo.depth
0
>>> marc.depth
1
>>> lian.depth
2
```

**exception** anytree.node.exceptions.**TreeError**

Bases: exceptions.RuntimeError

Tree Error.

**exception** `anytree.node.exceptions.LoopError`

Bases: `anytree.node.exceptions.TreeError`

Tree contains infinite loop.

## 3.2 Tree Iteration

Tree Iteration.

- `PreOrderIter`: iterate over tree using pre-order strategy (self, children)
- `PostOrderIter`: iterate over tree using post-order strategy (children, self)
- `LevelOrderIter`: iterate over tree using level-order strategy
- `LevelOrderGroupIter`: iterate over tree using level-order strategy returning group for every level
- `ZigZagGroupIter`: iterate over tree using level-order strategy returning group for every level

**class** `anytree.iterators.preorderiter.PreOrderIter`(*node*, *filter\_=None*, *stop=None*, *maxlevel=None*)

Bases: `anytree.iterators.abstractiter.AbstractIter`

Iterate over tree applying pre-order strategy starting at *node*.

Start at root and go-down until reaching a leaf node. Step upwards then, and search for the next leafs.

```
>>> from anytree import Node, RenderTree, AsciiStyle, PreOrderIter
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
>>> [node.name for node in PreOrderIter(f)]
['f', 'b', 'a', 'd', 'c', 'e', 'g', 'i', 'h']
>>> [node.name for node in PreOrderIter(f, maxlevel=3)]
['f', 'b', 'a', 'd', 'g', 'i']
>>> [node.name for node in PreOrderIter(f, filter_=lambda n: n.name not in ('e',
↪ 'g'))]
['f', 'b', 'a', 'd', 'c', 'i', 'h']
>>> [node.name for node in PreOrderIter(f, stop=lambda n: n.name == 'd')]
['f', 'b', 'a', 'g', 'i', 'h']
```

Base class for all iterators.

Iterate over tree starting at *node*.

**Keyword Arguments**

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

**class** anytree.iterators.postorderiter.**PostOrderIter**(*node*, *filter\_=None*, *stop=None*,  
*maxlevel=None*)

Bases: anytree.iterators.abstractiter.AbstractIter

Iterate over tree applying post-order strategy starting at *node*.

```
>>> from anytree import Node, RenderTree, AsciiStyle, PostOrderIter
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
>>> [node.name for node in PostOrderIter(f)]
['a', 'c', 'e', 'd', 'b', 'h', 'i', 'g', 'f']
>>> [node.name for node in PostOrderIter(f, maxlevel=3)]
['a', 'd', 'b', 'i', 'g', 'f']
>>> [node.name for node in PostOrderIter(f, filter_=lambda n: n.name not in ('e',
↪ 'g'))]
['a', 'c', 'd', 'b', 'h', 'i', 'f']
>>> [node.name for node in PostOrderIter(f, stop=lambda n: n.name == 'd')]
['a', 'b', 'h', 'i', 'g', 'f']
```

Base class for all iterators.

Iterate over tree starting at *node*.

**Keyword Arguments**

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

**class** anytree.iterators.levelorderiter.**LevelOrderIter**(*node*, *filter\_=None*, *stop=None*,  
*maxlevel=None*)

Bases: anytree.iterators.abstractiter.AbstractIter

Iterate over tree applying level-order strategy starting at *node*.

```

>>> from anytree import Node, RenderTree, AsciiStyle, LevelOrderIter
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
>>> [node.name for node in LevelOrderIter(f)]
['f', 'b', 'g', 'a', 'd', 'i', 'c', 'e', 'h']
>>> [node.name for node in LevelOrderIter(f, maxlevel=3)]
['f', 'b', 'g', 'a', 'd', 'i']
>>> [node.name for node in LevelOrderIter(f, filter_=lambda n: n.name not in ('e',
↪ 'g'))]
['f', 'b', 'a', 'd', 'i', 'c', 'h']
>>> [node.name for node in LevelOrderIter(f, stop=lambda n: n.name == 'd')]
['f', 'b', 'g', 'a', 'i', 'h']

```

Base class for all iterators.

Iterate over tree starting at *node*.

#### Keyword Arguments

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

```

class anytree.iterators.levelordergroupiter.LevelOrderGroupIter(node,          fil-
                                                                ter_=None,
                                                                stop=None,
                                                                maxlevel=None)

```

Bases: anytree.iterators.abstractiter.AbstractIter

Iterate over tree applying level-order strategy with grouping starting at *node*.

Return a tuple of nodes for each level. The first tuple contains the nodes at level 0 (always *node*). The second tuple contains the nodes at level 1 (children of *node*). The next level contains the children of the children, and so on.

```

>>> from anytree import Node, RenderTree, AsciiStyle, LevelOrderGroupIter
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)

```

```

>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
>>> [[node.name for node in children] for children in LevelOrderGroupIter(f)]
[['f'], ['b', 'g'], ['a', 'd', 'i'], ['c', 'e', 'h']]
>>> [[node.name for node in children] for children in LevelOrderGroupIter(f,
↪maxlevel=3)]
[['f'], ['b', 'g'], ['a', 'd', 'i']]
>>> [[node.name for node in children]
...  for children in LevelOrderGroupIter(f, filter_=lambda n: n.name not in ('e',
↪'g'))]
[['f'], ['b'], ['a', 'd', 'i'], ['c', 'h']]
>>> [[node.name for node in children]
...  for children in LevelOrderGroupIter(f, stop=lambda n: n.name == 'd')]
[['f'], ['b', 'g'], ['a', 'i'], ['h']]

```

Base class for all iterators.

Iterate over tree starting at *node*.

#### Keyword Arguments

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

```
class anytree.iterators.zigzaggroupiter.ZigZagGroupIter(node, filter_=None,
stop=None, maxlevel=None)
```

Bases: `anytree.iterators.abstractiter.AbstractIter`

Iterate over tree applying Zig-Zag strategy with grouping starting at *node*.

Return a tuple of nodes for each level. The first tuple contains the nodes at level 0 (always *node*). The second tuple contains the nodes at level 1 (children of *node*) in reversed order. The next level contains the children of the children in forward order, and so on.

```

>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b

```

```

|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h

>>> [[node.name for node in children] for children in ZigZagGroupIter(f)]
[['f'], ['g', 'b'], ['a', 'd', 'i'], ['h', 'e', 'c']]
>>> [[node.name for node in children] for children in ZigZagGroupIter(f,
↳maxlevel=3)]
[['f'], ['g', 'b'], ['a', 'd', 'i']]
>>> [[node.name for node in children]
...   for children in ZigZagGroupIter(f, filter_=lambda n: n.name not in ('e', 'g
↳'))]]
[['f'], ['b'], ['a', 'd', 'i'], ['h', 'c']]
>>> [[node.name for node in children]
...   for children in ZigZagGroupIter(f, stop=lambda n: n.name == 'd')]
[['f'], ['g', 'b'], ['a', 'i'], ['h']]

```

Base class for all iterators.

Iterate over tree starting at *node*.

#### Keyword Arguments

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

## 3.3 Tree Rendering

Tree Rendering.

- **RenderTree** using the following styles:

- *AsciiStyle*
- *ContStyle*
- *ContRoundStyle*
- *DoubleStyle*

**class** anytree.render.Row(*pre, fill, node*)

Bases: *tuple*

Create new instance of Row(*pre, fill, node*)

**fill**

Alias for field number 1

**node**

Alias for field number 2

**pre**

Alias for field number 0

**class** `anytree.render.AbstractStyle` (*vertical, cont, end*)  
Bases: `object`

Tree Render Style.

**Parameters**

- **vertical** – Sign for vertical line.
- **cont** – Chars for a continued branch.
- **end** – Chars for the last branch.

**empty**

Empty string as placeholder.

**class** `anytree.render.AsciiStyle`  
Bases: `anytree.render.AbstractStyle`

Ascii style.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
```

```
>>> print(RenderTree(root, style=AsciiStyle()))
Node('/root')
|-- Node('/root/sub0')
|   |-- Node('/root/sub0/sub0B')
|   +-- Node('/root/sub0/sub0A')
+-- Node('/root/sub1')
```

**class** `anytree.render.ContStyle`  
Bases: `anytree.render.AbstractStyle`

Continued style, without gaps.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
```

```
>>> print(RenderTree(root, style=ContStyle()))
Node('/root')
- Node('/root/sub0')
|   - Node('/root/sub0/sub0B')
|   - Node('/root/sub0/sub0A')
- Node('/root/sub1')
```

**class** `anytree.render.ContRoundStyle`  
Bases: `anytree.render.AbstractStyle`

Continued style, without gaps, round edges.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root")
```



```
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
```

```
>>> print(RenderTree(root, style=ContRoundStyle()))
Node('/root')
- Node('/root/sub0')
|   - Node('/root/sub0/sub0B')
|   - Node('/root/sub0/sub0A')
- Node('/root/sub1')
```

**class** `anytree.render.DoubleStyle`  
 Bases: `anytree.render.AbstractStyle`

Double line style, without gaps.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
```

```
>>> print(RenderTree(root, style=DoubleStyle))
Node('/root')
Node('/root/sub0')
Node('/root/sub0/sub0B')
Node('/root/sub0/sub0A')
Node('/root/sub1')
```

**class** `anytree.render.RenderTree` (`node`, `style=ContStyle()`, `childiter=<type 'list'>`)  
 Bases: `object`

Render tree starting at *node*.

#### Keyword Arguments

- **style** (`AbstractStyle`) – Render Style.
- **childiter** – Child iterator.

`RenderTree` is an iterator, returning a tuple with 3 items:

*pre* tree prefix.

*fill* filling for multiline entries.

*node* `NodeMixin` object.

It is up to the user to assemble these parts to a whole.

```
>>> from anytree import Node, RenderTree
>>> root = Node("root", lines=["c0fe", "c0de"])
>>> s0 = Node("sub0", parent=root, lines=["ha", "ba"])
>>> s0b = Node("sub0B", parent=s0, lines=["1", "2", "3"])
>>> s0a = Node("sub0A", parent=s0, lines=["a", "b"])
>>> s1 = Node("sub1", parent=root, lines=["Z"])
```

Simple one line:

```
>>> for pre, _, node in RenderTree(root):
...     print("%s%s" % (pre, node.name))
root
- sub0
|   - sub0B
|   - sub0A
- sub1
```

Multiline:

```
>>> for pre, fill, node in RenderTree(root):
...     print("%s%s" % (pre, node.lines[0]))
...     for line in node.lines[1:]:
...         print("%s%s" % (fill, line))
c0fe
c0de
- ha
|   ba
|   - 1
|   |   2
|   |   3
|   - a
|       b
- Z
```

The *childiter* is responsible for iterating over child nodes at the same level. An reversed order can be achieved by using *reversed*.

```
>>> for row in RenderTree(root, childiter=reversed):
...     print("%s%s" % (row.pre, row.node.name))
root
- sub1
- sub0
  - sub0A
  - sub0B
```

Or writing your own sort function:

```
>>> def mysort(items):
...     return sorted(items, key=lambda item: item.name)
>>> for row in RenderTree(root, childiter=mysort):
...     print("%s%s" % (row.pre, row.node.name))
root
- sub0
|   - sub0A
|   - sub0B
- sub1
```

*by\_attr* simplifies attribute rendering and supports multiline:

```
>>> print(RenderTree(root).by_attr())
root
- sub0
|   - sub0B
|   - sub0A
- sub1
>>> print(RenderTree(root).by_attr("lines"))
c0fe
```

```

c0de
- ha
|  ba
|  - 1
|  |  2
|  |  3
|  - a
|      b
- z

```

**by\_attr** (*attrname*='name')

Return rendered tree with node attribute *attrname*.

## 3.4 Searching

Node Searching.

`anytree.search.findall` (*node*, *filter\_=None*, *stop=None*, *maxlevel=None*, *mincount=None*, *maxcount=None*)

Search nodes matching *filter\_* but stop at *maxlevel* or *stop*.

Return tuple with matching nodes.

**Parameters** *node* – top node, start searching.

**Keyword Arguments**

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.
- **mincount** (*int*) – minimum number of nodes.
- **maxcount** (*int*) – maximum number of nodes.

Example tree:

```

>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h

```

```
>>> findall(f, filter_=lambda node: node.name in ("a", "b"))
(Node('/f/b'), Node('/f/b/a'))
>>> findall(f, filter_=lambda node: d in node.path)
(Node('/f/b/d'), Node('/f/b/d/c'), Node('/f/b/d/e'))
```

The number of matches can be limited:

```
>>> findall(f, filter_=lambda node: d in node.path, mincount=4)
Traceback (most recent call last):
...
anytree.search.CountError: Expecting at least 4 elements, but found 3. ... Node('/
↳ f/b/d/e')
>>> findall(f, filter_=lambda node: d in node.path, maxcount=2)
Traceback (most recent call last):
...
anytree.search.CountError: Expecting 2 elements at maximum, but found 3. ... Node(
↳ '/f/b/d/e')
```

`anytree.search.findall_by_attr` (*node*, *value*, *name*='name', *maxlevel*=None, *mincount*=None, *maxcount*=None)

Search nodes with attribute *name* having *value* but stop at *maxlevel*.

Return tuple with matching nodes.

#### Parameters

- **node** – top node, start searching.
- **value** – value which need to match

#### Keyword Arguments

- **name** (*str*) – attribute name need to match
- **maxlevel** (*int*) – maximum decending in the node hierarchy.
- **mincount** (*int*) – minimum number of nodes.
- **maxcount** (*int*) – maximum number of nodes.

Example tree:

```
>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
```

```
>>> findall_by_attr(f, "d")
(Node('/f/b/d'),)
```

`anytree.search.find(node, filter_=None, stop=None, maxlevel=None)`  
 Search for *single* node matching *filter\_* but stop at *maxlevel* or *stop*.

Return matching node.

**Parameters** *node* – top node, start searching.

**Keyword Arguments**

- **filter** – function called with every *node* as argument, *node* is returned if *True*.
- **stop** – stop iteration at *node* if *stop* function returns *True* for *node*.
- **maxlevel** (*int*) – maximum descending in the node hierarchy.

Example tree:

```
>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
```

```
>>> find(f, lambda node: node.name == "d")
Node('/f/b/d')
>>> find(f, lambda node: node.name == "z")
>>> find(f, lambda node: b in node.path)
Traceback (most recent call last):
...
anytree.search.CountError: Expecting 1 elements at maximum, but found 5. (Node('/
↪f/b')... Node('/f/b/d/e'))
```

`anytree.search.find_by_attr(node, value, name='name', maxlevel=None)`  
 Search for *single* node with attribute *name* having *value* but stop at *maxlevel*.

Return tuple with matching nodes.

**Parameters**

- **node** – top node, start searching.
- **value** – value which need to match

**Keyword Arguments**

- **name** (*str*) – attribute name need to match
- **maxlevel** (*int*) – maximum decending in the node hierarchy.

Example tree:

```
>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d, foo=4)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()).by_attr())
f
|-- b
|   |-- a
|   +-- d
|       |-- c
|       +-- e
+-- g
    +-- i
        +-- h
```

```
>>> find_by_attr(f, "d")
Node('/f/b/d')
>>> find_by_attr(f, name="foo", value=4)
Node('/f/b/d/c', foo=4)
>>> find_by_attr(f, name="foo", value=8)
```

**exception** `anytree.search.CountError` (*msg, result*)

Bases: `exceptions.RuntimeError`

Error raised on *mincount* or *maxcount* mismatch.

## 3.5 Node Resolution

**class** `anytree.resolver.Resolver` (*pathattr='name'*)

Bases: `object`

Resolve *NodeMixin* paths using attribute *pathattr*.

**get** (*node, path*)

Return instance at *path*.

An example module tree:

```
>>> from anytree import Node
>>> top = Node("top", parent=None)
>>> sub0 = Node("sub0", parent=top)
>>> sub0sub0 = Node("sub0sub0", parent=sub0)
>>> sub0sub1 = Node("sub0sub1", parent=sub0)
>>> sub1 = Node("sub1", parent=top)
```

A resolver using the *name* attribute:

```
>>> r = Resolver('name')
```

Relative paths:

```
>>> r.get(top, "sub0/sub0sub0")
Node('/top/sub0/sub0sub0')
>>> r.get(sub1, "..")
Node('/top')
>>> r.get(sub1, "../sub0/sub0sub1")
Node('/top/sub0/sub0sub1')
>>> r.get(sub1, ".")
Node('/top/sub1')
>>> r.get(sub1, "")
Node('/top/sub1')
>>> r.get(top, "sub2")
Traceback (most recent call last):
...
anytree.resolver.ChildResolverError: Node('/top') has no child sub2. Children_
↳are: 'sub0', 'sub1'.
```

Absolute paths:

```
>>> r.get(sub0sub0, "/top")
Node('/top')
>>> r.get(sub0sub0, "/top/sub0")
Node('/top/sub0')
>>> r.get(sub0sub0, "/")
Traceback (most recent call last):
...
anytree.resolver.ResolverError: root node missing. root is '/top'.
>>> r.get(sub0sub0, "/bar")
Traceback (most recent call last):
...
anytree.resolver.ResolverError: unknown root node '/bar'. root is '/top'.
```

**glob** (*node*, *path*)

Return instances at *path* supporting wildcards.

Behaves identical to *get*, but accepts wildcards and returns a list of found nodes.

- \* matches any characters, except '/'.
- ? matches a single character, except '/'.

An example module tree:

```
>>> from anytree import Node
>>> top = Node("top", parent=None)
>>> sub0 = Node("sub0", parent=top)
>>> sub0sub0 = Node("sub0", parent=sub0)
>>> sub0sub1 = Node("sub1", parent=sub0)
>>> sub1 = Node("sub1", parent=top)
>>> sub1sub0 = Node("sub0", parent=sub1)
```

A resolver using the *name* attribute:

```
>>> r = Resolver('name')
```

Relative paths:

```
>>> r.glob(top, "sub0/sub?")
[Node('/top/sub0/sub0'), Node('/top/sub0/sub1')]
>>> r.glob(sub1, "../.*")
[Node('/top/sub0'), Node('/top/sub1')]
>>> r.glob(top, "*/.*")
[Node('/top/sub0/sub0'), Node('/top/sub0/sub1'), Node('/top/sub1/sub0')]
>>> r.glob(top, "*/sub0")
[Node('/top/sub0/sub0'), Node('/top/sub1/sub0')]
>>> r.glob(top, "sub1/sub1")
Traceback (most recent call last):
...
anytree.resolver.ChildResolverError: Node('/top/sub1') has no child sub1.
↳ Children are: 'sub0'.
```

Non-matching wildcards are no error:

```
>>> r.glob(top, "bar*")
[]
>>> r.glob(top, "sub2")
Traceback (most recent call last):
...
anytree.resolver.ChildResolverError: Node('/top') has no child sub2. Children_
↳ are: 'sub0', 'sub1'.
```

Absolute paths:

```
>>> r.glob(sub0sub0, "/top/*")
[Node('/top/sub0'), Node('/top/sub1')]
>>> r.glob(sub0sub0, "/")
Traceback (most recent call last):
...
anytree.resolver.ResolverError: root node missing. root is '/top'.
>>> r.glob(sub0sub0, "/bar")
Traceback (most recent call last):
...
anytree.resolver.ResolverError: unknown root node '/bar'. root is '/top'.
```

**static is\_wildcard**(*path*)  
Return *True* is a wildcard.

**exception** anytree.resolver.**ResolverError** (*node, child, msg*)  
Bases: `exceptions.RuntimeError`  
Resolve Error at *node* handling *child*.

**exception** anytree.resolver.**ChildResolverError** (*node, child, pathattr*)  
Bases: `anytree.resolver.ResolverError`  
Child Resolve Error at *node* handling *child*.

## 3.6 Tree Walking

**class** anytree.walker.**Walker**  
Bases: `object`  
Walk from one node to another.



**walk** (*start*, *end*)

Walk from *start* node to *end* node.

**Returns** *upwards* is a list of nodes to go upward to. *common* top node. *downwards* is a list of nodes to go downward to.

**Return type** (*upwards*, *common*, *downwards*)

**Raises** *WalkError* – on no common root node.

```
>>> from anytree import Node, RenderTree, AsciiStyle
>>> f = Node("f")
>>> b = Node("b", parent=f)
>>> a = Node("a", parent=b)
>>> d = Node("d", parent=b)
>>> c = Node("c", parent=d)
>>> e = Node("e", parent=d)
>>> g = Node("g", parent=f)
>>> i = Node("i", parent=g)
>>> h = Node("h", parent=i)
>>> print(RenderTree(f, style=AsciiStyle()))
Node('/f')
|-- Node('/f/b')
|   |-- Node('/f/b/a')
|   +-- Node('/f/b/d')
|       |-- Node('/f/b/d/c')
|       +-- Node('/f/b/d/e')
+-- Node('/f/g')
    +-- Node('/f/g/i')
        +-- Node('/f/g/i/h')
```

Create a walker:

```
>>> w = Walker()
```

This class is made for walking:

```
>>> w.walk(f, f)
((), Node('/f'), ())
>>> w.walk(f, b)
((), Node('/f'), (Node('/f/b'),))
>>> w.walk(b, f)
((Node('/f/b'),), Node('/f'), ())
>>> w.walk(h, e)
((Node('/f/g/i/h'), Node('/f/g/i'), Node('/f/g')), Node('/f'), (Node('/f/b'),
↳Node('/f/b/d'), Node('/f/b/d/e'))
>>> w.walk(d, e)
((), Node('/f/b/d'), (Node('/f/b/d/e'),))
```

For a proper walking the nodes need to be part of the same tree:

```
>>> w.walk(Node("a"), Node("b"))
Traceback (most recent call last):
...
anytree.walker.WalkError: Node('/a') and Node('/b') are not part of the same_
↳tree.
```

**exception** anytree.walker.**WalkError**

Bases: exceptions.RuntimeError

Walk Error.

One fundamental idea behind *anytree* is the common tree node data structure, which can be imported from different formats and exported to different formats.

Available importers:

## 4.1 Dictionary Importer

```
class anytree.importer.dictimporter.DictImporter (nodecls=<class  
                                                    'anytree.node.anynode.AnyNode'>)
```

Bases: `object`

Import Tree from dictionary.

Every dictionary is converted to an instance of *nodecls*. The dictionaries listed in the children attribute are converted likewise and added as children.

**Keyword Arguments** `nodecls` – class used for nodes.

```
>>> from anytree.importer import DictImporter
>>> from anytree import RenderTree
>>> importer = DictImporter()
>>> data = {
...     'a': 'root',
...     'children': [{ 'a': 'sub0',
...                     'children': [{ 'a': 'sub0A', 'b': 'foo'}, { 'a': 'sub0B' } ] },
...                  { 'a': 'sub1' } ] }
>>> root = importer.import_(data)
>>> print(RenderTree(root))
AnyNode(a='root')
- AnyNode(a='sub0')
|   - AnyNode(a='sub0A', b='foo')
|   - AnyNode(a='sub0B')
- AnyNode(a='sub1')
```

**import\_**(*data*)  
Import tree from *data*.

## 4.2 JSON Importer

**class** anytree.importer.jsonimporter.**JsonImporter**(*dictimporter=None, \*\*kwargs*)  
Bases: `object`

Import Tree from JSON.

The JSON is read and converted to a dictionary via *dictimporter*.

### Keyword Arguments

- **dictimporter** – Dictionary Importer used (see *DictImporter*).
- **kwargs** – All other arguments are passed to `json.load/json.loads`. See documentation for reference.

```
>>> from anytree.importer import JsonImporter
>>> from anytree import RenderTree
>>> importer = JsonImporter()
>>> data = '''
... {
...   "a": "root",
...   "children": [
...     {
...       "a": "sub0",
...       "children": [
...         {
...           "a": "sub0A",
...           "b": "foo"
...         },
...         {
...           "a": "sub0B"
...         }
...       ]
...     },
...     {
...       "a": "sub1"
...     }
...   ]
... }'''
>>> root = importer.import_(data)
>>> print(RenderTree(root))
AnyNode(a='root')
- AnyNode(a='sub0')
|   - AnyNode(a='sub0A', b='foo')
|   - AnyNode(a='sub0B')
- AnyNode(a='sub1')
```

**import\_**(*data*)  
Read JSON from *data*.

**read**(*filehandle*)  
Read JSON from *filehandle*.

Importer missing? File a request here: [Issues](#).

One fundamental idea behind *anytree* is the common tree node data structure, which can be imported from different formats and exported to different formats.

Available exporters:

## 5.1 Dictionary Exporter

```
class anytree.exporter.dictexporter.DictExporter(dictcls=<type 'dict'>, attriter=None,
                                                  childiter=<type 'list'>)
```

Bases: `object`

Tree to dictionary exporter.

Every node is converted to a dictionary with all instance attributes as key-value pairs. Child nodes are exported to the `children` attribute. A list of dictionaries.

### Keyword Arguments

- **dictcls** – class used as dictionary. `Dictionary` displays by default.
- **attriter** – attribute iterator for sorting and/or filtering.
- **childiter** – child iterator for sorting and/or filtering.

```
>>> from pprint import pprint # just for nice printing
>>> from anytree import AnyNode
>>> from anytree.exporter import DictExporter
>>> root = AnyNode(a="root")
>>> s0 = AnyNode(a="sub0", parent=root)
>>> s0a = AnyNode(a="sub0A", b="foo", parent=s0)
>>> s0b = AnyNode(a="sub0B", parent=s0)
>>> s1 = AnyNode(a="sub1", parent=root)
```

```
>>> exporter = DictExporter()
>>> pprint(exporter.export(root)) # order within dictionary might vary!
{'a': 'root',
 'children': [{'a': 'sub0',
                'children': [{'a': 'sub0A', 'b': 'foo'}, {'a': 'sub0B'}]},
               {'a': 'sub1'}]}
```

Python's dictionary *dict* does not preserve order. `collections.OrderedDict` does. In this case attributes can be ordered via *attriter*.

```
>>> from collections import OrderedDict
>>> exporter = DictExporter(dictcls=OrderedDict, attriter=sorted)
>>> pprint(exporter.export(root))
OrderedDict([('a', 'root'),
             ('children',
              [OrderedDict([('a', 'sub0'),
                           ('children',
                            [OrderedDict([('a', 'sub0A'), ('b', 'foo')]),
                            OrderedDict([('a', 'sub0B')])])])]),
             OrderedDict([('a', 'sub1')])])])])
```

The attribute iterator *attriter* may be used for filtering too. For example, just dump attributes named *a*:

```
>>> exporter = DictExporter(attriter=lambda attrs: [(k, v) for k, v in attrs if k_
↳ == "a"])
>>> pprint(exporter.export(root))
{'a': 'root',
 'children': [{'a': 'sub0', 'children': [{'a': 'sub0A'}, {'a': 'sub0B'}]},
               {'a': 'sub1'}]}
```

The child iterator *childiter* can be used for sorting and filtering likewise:

```
>>> exporter = DictExporter(childiter=lambda children: [child for child in_
↳ children if "0" in child.a])
>>> pprint(exporter.export(root))
{'a': 'root',
 'children': [{'a': 'sub0',
                'children': [{'a': 'sub0A', 'b': 'foo'}, {'a': 'sub0B'}]}]}
```

**export** (*node*)

Export tree starting at *node*.

## 5.2 JSON Exporter

**class** `anytree.exporter.jsonexporter.JsonExporter` (*dictexporter=None, \*\*kwargs*)

Bases: `object`

Tree to JSON exporter.

The tree is converted to a dictionary via *dictexporter* and exported to JSON.

### Keyword Arguments

- **dictexporter** – Dictionary Exporter used (see *DictExporter*).
- **kwargs** – All other arguments are passed to `json.dump/json.dumps`. See documentation for reference.

```

>>> from anytree import AnyNode
>>> from anytree.exporter import JsonExporter
>>> root = AnyNode(a="root")
>>> s0 = AnyNode(a="sub0", parent=root)
>>> s0a = AnyNode(a="sub0A", b="foo", parent=s0)
>>> s0b = AnyNode(a="sub0B", parent=s0)
>>> s1 = AnyNode(a="sub1", parent=root)

>>> exporter = JsonExporter(indent=2, sort_keys=True)
>>> print(exporter.export(root))
{
  "a": "root",
  "children": [
    {
      "a": "sub0",
      "children": [
        {
          "a": "sub0A",
          "b": "foo"
        },
        {
          "a": "sub0B"
        }
      ]
    },
    {
      "a": "sub1"
    }
  ]
}

```

**export** (*node*)

Return JSON for tree starting at *node*.

**write** (*node*, *filehandle*)

Write JSON to *filehandle* starting at *node*.

## 5.3 Dot Exporter

For any details about the *dot* language, see [graphviz](#)

**class** anytree.exporter.dotexporter.**DotExporter** (*node*, *graph*='digraph', *name*='tree', *options*=None, *indent*=4, *nodenamefunc*=None, *nodeattrfunc*=None, *edgeattrfunc*=None, *edgetypefunc*=None)

Bases: `object`

Dot Language Exporter.

**Parameters** *node* (`Node`) – start node.

**Keyword Arguments**

- **graph** – DOT graph type.
- **name** – DOT graph name.
- **options** – list of options added to the graph.

- **indent** (*int*) – number of spaces for indent.
- **nodenamefunc** – Function to extract node name from *node* object. The function shall accept one *node* object as argument and return the name of it.
- **nodeattrfunc** – Function to decorate a node with attributes. The function shall accept one *node* object as argument and return the attributes.
- **edgeattrfunc** – Function to decorate a edge with attributes. The function shall accept two *node* objects as argument. The first the node and the second the child and return the attributes.
- **edgetypefunc** – Function to which gives the edge type. The function shall accept two *node* objects as argument. The first the node and the second the child and return the edge (i.e. '->').

```
>>> from anytree import Node
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root, edge=2)
>>> s0b = Node("sub0B", parent=s0, foo=4, edge=109)
>>> s0a = Node("sub0A", parent=s0, edge="")
>>> s1 = Node("sub1", parent=root, edge="")
>>> s1a = Node("sub1A", parent=s1, edge=7)
>>> s1b = Node("sub1B", parent=s1, edge=8)
>>> s1c = Node("sub1C", parent=s1, edge=22)
>>> s1ca = Node("sub1Ca", parent=s1c, edge=42)
```

A directed graph:

```
>>> from anytree.exporter import DotExporter
>>> for line in DotExporter(root):
...     print(line)
digraph tree {
    "root";
    "sub0";
    "sub0B";
    "sub0A";
    "sub1";
    "sub1A";
    "sub1B";
    "sub1C";
    "sub1Ca";
    "root" -> "sub0";
    "root" -> "sub1";
    "sub0" -> "sub0B";
    "sub0" -> "sub0A";
    "sub1" -> "sub1A";
    "sub1" -> "sub1B";
    "sub1" -> "sub1C";
    "sub1C" -> "sub1Ca";
}
```

An undirected graph:

```
>>> def nodenamefunc(node):
...     return '%s:%s' % (node.name, node.depth)
>>> def edgeattrfunc(node, child):
...     return 'label="%s:%s"' % (node.name, child.name)
>>> def edgetypefunc(node, child):
```



```

...     return '--'
    >>> from anytree.exporter import DotExporter
>>> for line in DotExporter(root, graph="graph",
...                          nodeattrfunc=nodeattrfunc,
...                          nodeattrfunc=lambda node: "shape=box",
...                          edgeattrfunc=edgeattrfunc,
...                          edgetypefunc=edgetypefunc):
...     print(line)
graph tree {
    "root:0" [shape=box];
    "sub0:1" [shape=box];
    "sub0B:2" [shape=box];
    "sub0A:2" [shape=box];
    "sub1:1" [shape=box];
    "sub1A:2" [shape=box];
    "sub1B:2" [shape=box];
    "sub1C:2" [shape=box];
    "sub1Ca:3" [shape=box];
    "root:0" -- "sub0:1" [label="root:sub0"];
    "root:0" -- "sub1:1" [label="root:sub1"];
    "sub0:1" -- "sub0B:2" [label="sub0:sub0B"];
    "sub0:1" -- "sub0A:2" [label="sub0:sub0A"];
    "sub1:1" -- "sub1A:2" [label="sub1:sub1A"];
    "sub1:1" -- "sub1B:2" [label="sub1:sub1B"];
    "sub1:1" -- "sub1C:2" [label="sub1:sub1C"];
    "sub1C:2" -- "sub1Ca:3" [label="sub1C:sub1Ca"];
}

```

**to\_dotfile** (*filename*)Write graph to *filename*.

```

>>> from anytree import Node
>>> root = Node("root")
>>> s0 = Node("sub0", parent=root)
>>> s0b = Node("sub0B", parent=s0)
>>> s0a = Node("sub0A", parent=s0)
>>> s1 = Node("sub1", parent=root)
>>> s1a = Node("sub1A", parent=s1)
>>> s1b = Node("sub1B", parent=s1)
>>> s1c = Node("sub1C", parent=s1)
>>> s1ca = Node("sub1Ca", parent=s1c)

```

```

>>> from anytree.exporter import DotExporter
>>> DotExporter(root).to_dotfile("tree.dot")

```

The generated file should be handed over to the *dot* tool from the <http://www.graphviz.org/> package:

```
$ dot tree.dot -T png -o tree.png
```

**to\_picture** (*filename*)Write graph to a temporary file and invoke *dot*.

The output file type is automatically detected from the file suffix.

*'graphviz' needs to be installed, before usage of this method.*Exporter missing? File a request here: [Issues](#).



## 6.1 Read-only Tree

**Application:** A read-only tree data structure, which denies modifications.

The `Node.pre_attach` and `Node.pre_detach` hooks can be used for blocking tree modifications. If they raise an *Exception*, the tree is not modified.

```
>>> from anytree import NodeMixin, RenderTree
```

The exception:

```
>>> class ReadOnlyError(RuntimeError):
...     pass
```

### 6.1.1 Permanent

The read-only attribute needs to be set after attaching to parent:

```
>>> class ReadOnlyNode(NodeMixin):
...
...     def __init__(self, foo, parent=None):
...         super(ReadOnlyNode, self).__init__()
...         self.foo = foo
...         self.__readonly = False
...         self.parent = parent
...         self.__readonly = True
...
...     def _pre_attach(self, parent):
...         if self.__readonly:
...             raise ReadOnlyError()
...
... 
```

```
...     def _pre_detach(self, parent):
...         raise ReadOnlyError()
```

An example tree:

```
>>> a = ReadOnlyNode("a")
>>> a0 = ReadOnlyNode("a0", parent=a)
>>> a1 = ReadOnlyNode("a1", parent=a)
>>> a1a = ReadOnlyNode("a1a", parent=a1)
>>> a2 = ReadOnlyNode("a2", parent=a)
>>> print(RenderTree(a).by_attr("foo"))
a
- a0
- a1
  | - a1a
- a2
```

Modifications raise an *ReadOnlyError*

```
>>> a0.parent = a2
Traceback (most recent call last):
...
ReadOnlyError
>>> a.children = [a1]
Traceback (most recent call last):
...
ReadOnlyError
```

The tree structure is untouched:

```
>>> print(RenderTree(a).by_attr("foo"))
a
- a0
- a1
  | - a1a
- a2
```

## 6.1.2 Temporary

To select the read-only mode temporarily, the root node should provide an attribute for all child nodes, set *after* construction.

```
>>> class ReadOnlyNode(NodeMixin):
...     def __init__(self, foo, parent=None):
...         super(ReadOnlyNode, self).__init__()
...         self.readonly = False
...         self.foo = foo
...         self.parent = parent
...     def _pre_attach(self, parent):
...         if self.root.readonly:
...             raise ReadOnlyError()
...     def _pre_detach(self, parent):
...         if self.root.readonly:
...             raise ReadOnlyError()
```

An example tree:

```
>>> a = ReadOnlyNode("a")
>>> a0 = ReadOnlyNode("a0", parent=a)
>>> a1 = ReadOnlyNode("a1", parent=a)
>>> a1a = ReadOnlyNode("a1a", parent=a1)
>>> a2 = ReadOnlyNode("a2", parent=a)
>>> print(RenderTree(a).by_attr("foo"))
a
- a0
- a1
|   - a1a
- a2
```

Switch to read-only mode:

```
>>> a.readonly = True
```

```
>>> a0.parent = a2
Traceback (most recent call last):
...
ReadOnlyError
>>> a.children = [a1]
Traceback (most recent call last):
...
ReadOnlyError
```

Disable read-only mode:

```
>>> a.readonly = False
```

Modifications are allowed now:

```
>>> a0.parent = a2
>>> print(RenderTree(a).by_attr("foo"))
a
- a1
|   - a1a
- a2
    - a0
```

## 6.2 YAML Import/Export

**YAML** (YAML Ain't Markup Language) is a human-readable data serialization language.

**PYYAML** implements importer and exporter in python. *Please install it, before continuing*

---

**Note:** anytree package does not depend on any external packages. It does **NOT** include **PYYAML**.

---

### 6.2.1 Export

The *DictExporter* converts any tree to a dictionary, which can be handled by *yaml.dump*.

```
>>> import yaml
>>> from anytree import AnyNode
>>> from anytree.exporter import DictExporter
```

Example tree:

```
>>> root = AnyNode(a="root")
>>> s0 = AnyNode(a="sub0", parent=root)
>>> s0a = AnyNode(a="sub0A", b="foo", parent=s0)
>>> s0b = AnyNode(a="sub0B", parent=s0)
>>> s1 = AnyNode(a="sub1", parent=root)
```

Export to dictionary and convert to YAML:

```
>>> dct = DictExporter().export(root)
>>> print(yaml.dump(dct, default_flow_style=False))
a: root
children:
- a: sub0
  children:
  - a: sub0A
    b: foo
  - a: sub0B
- a: sub1
```

*DictExporter* controls the content. *yaml.dump* controls the YAML related stuff.

To dump to a file, use an file object as second argument:

```
>>> with open("/path/to/file", "w") as file:
...     yaml.dump(data, file)
```

## 6.2.2 Import

The *yaml.load* function reads YAML data — a dictionary, which *DictImporter* converts to a tree.

```
>>> import yaml
>>> from anytree.importer import DictImporter
>>> from pprint import pprint # just for nice printing
>>> from anytree import RenderTree # just for nice printing
```

Example data:

```
>>> data = """
... a: root
... children:
... - a: sub0
...   children:
...   - a: sub0A
...     b: foo
...   - a: sub0B
... - a: sub1
... """
```

Import to dictionary and convert to tree:

```
>>> dct = yaml.load(data)
>>> pprint(dct)
{'a': 'root',
 'children': [{a: 'sub0',
                'children': [{a: 'sub0A', 'b': 'foo'}, {a: 'sub0B'}]},
               {a: 'sub1'}]}
>>> root = DictImporter().import_(dct)
>>> print(RenderTree(root))
AnyNode(a='root')
- AnyNode(a='sub0')
|   - AnyNode(a='sub0A', b='foo')
|   - AnyNode(a='sub0B')
- AnyNode(a='sub1')
```





# CHAPTER 7

---

## Getting started

---

Usage is simple.

### Construction

```
>>> from anytree import Node, RenderTree
>>> udo = Node("Udo")
>>> marc = Node("Marc", parent=udo)
>>> lian = Node("Lian", parent=marc)
>>> dan = Node("Dan", parent=udo)
>>> jet = Node("Jet", parent=dan)
>>> jan = Node("Jan", parent=dan)
>>> joe = Node("Joe", parent=dan)
```


### Node

```
>>> print(udo)
Node('/Udo')
>>> print(joe)
Node('/Udo/Dan/Joe')
```

### Tree

```
>>> for pre, fill, node in RenderTree(udo):
...     print("%s%s" % (pre, node.name))
Udo
- Marc
|   - Lian
- Dan
    - Jet
    - Jan
    - Joe
```

```
>>> from anytree.exporter import DotExporter
>>> # graphviz needs to be installed for the next line!
>>> DotExporter(udo).to_picture("udo.png")
```

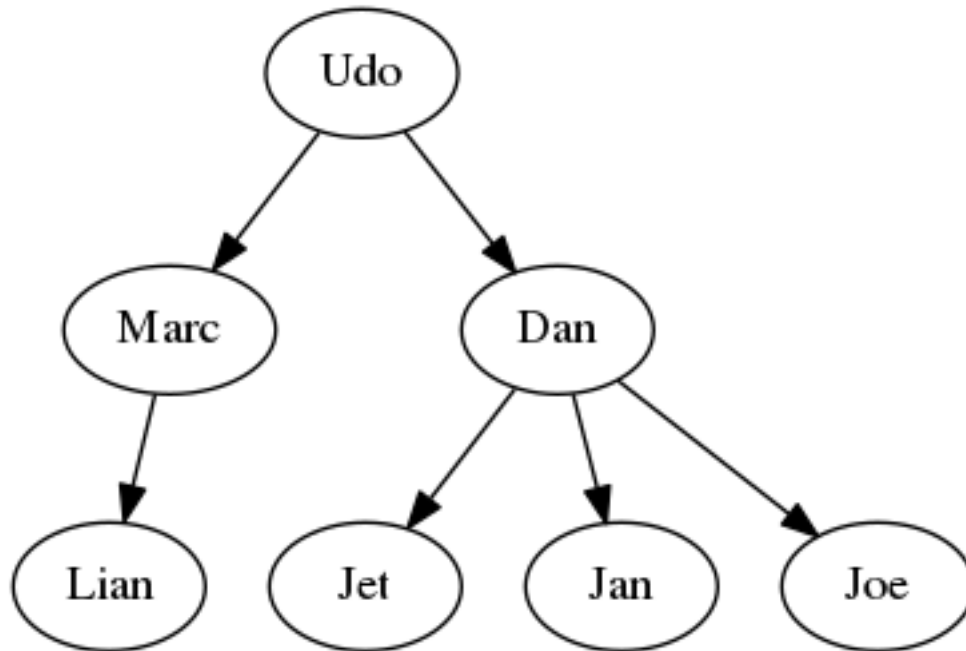

### Manipulation

A second tree:

```

>>> mary = Node("Mary")
>>> urs = Node("Urs", parent=mary)
>>> chris = Node("Chris", parent=mary)
>>> marta = Node("Marta", parent=mary)
>>> print(RenderTree(mary))
Node('/Mary')
- Node('/Mary/Urs')
- Node('/Mary/Chris')
- Node('/Mary/Marta')
  
```

### Append:

```

>>> udo.parent = mary
>>> print(RenderTree(mary))
Node('/Mary')
- Node('/Mary/Urs')
- Node('/Mary/Chris')
- Node('/Mary/Marta')
- Node('/Mary/Udo')
  - Node('/Mary/Udo/Marc')
    | - Node('/Mary/Udo/Marc/Lian')
  - Node('/Mary/Udo/Dan')
    - Node('/Mary/Udo/Dan/Jet')
    - Node('/Mary/Udo/Dan/Jan')
    - Node('/Mary/Udo/Dan/Joe')
  
```

### Subtree rendering:

```

>>> print(RenderTree(marc))
Node('/Mary/Udo/Marc')
- Node('/Mary/Udo/Marc/Lian')
  
```

Cut:

```
>>> dan.parent = None
>>> print(RenderTree(dan))
Node('/Dan')
- Node('/Dan/Jet')
- Node('/Dan/Jan')
- Node('/Dan/Joe')
```



### a

- `anytree.exporter.dictexporter`, [33](#)
- `anytree.exporter.dotexporter`, [35](#)
- `anytree.exporter.jsonexporter`, [34](#)
- `anytree.importer.dictimporter`, [31](#)
- `anytree.importer.jsonimporter`, [32](#)
- `anytree.iterators`, [15](#)
- `anytree.iterators.levelordergroupiter`,  
[17](#)
- `anytree.iterators.levelorderiter`, [16](#)
- `anytree.iterators.postorderiter`, [16](#)
- `anytree.iterators.preorderiter`, [15](#)
- `anytree.iterators.zigzaggroupiter`, [18](#)
- `anytree.node`, [9](#)
- `anytree.node.anynode`, [9](#)
- `anytree.node.exceptions`, [14](#)
- `anytree.node.node`, [10](#)
- `anytree.node.nodemixin`, [10](#)
- `anytree.render`, [19](#)
- `anytree.resolver`, [26](#)
- `anytree.search`, [23](#)
- `anytree.walker`, [28](#)



## A

AbstractStyle (class in anytree.render), 19  
ancestors (anytree.node.nodemixin.NodeMixin attribute), 12  
ancestors (anytree.node.nodemixin.NodeMixin attribute), 12  
AnyNode (class in anytree.node.anynode), 9  
anytree.exporter.dictexporter (module), 33  
anytree.exporter.dotexporter (module), 35  
anytree.exporter.jsonexporter (module), 34  
anytree.importer.dictimporter (module), 31  
anytree.importer.jsonimporter (module), 32  
anytree.iterators (module), 15  
anytree.iterators.levelordergroupiter (module), 17  
anytree.iterators.levelorderiter (module), 16  
anytree.iterators.postorderiter (module), 16  
anytree.iterators.preorderiter (module), 15  
anytree.iterators.zigzaggroupiter (module), 18  
anytree.node (module), 9  
anytree.node.anynode (module), 9  
anytree.node.exceptions (module), 14  
anytree.node.node (module), 10  
anytree.node.nodemixin (module), 10  
anytree.render (module), 19  
anytree.resolver (module), 26  
anytree.search (module), 23  
anytree.walker (module), 28  
AsciiStyle (class in anytree.render), 20

## B

by\_attr() (anytree.render.RenderTree method), 23

## C

children (anytree.node.nodemixin.NodeMixin attribute), 11  
ChildResolverError, 28  
ContRoundStyle (class in anytree.render), 20  
ContStyle (class in anytree.render), 20  
CountError, 26

## D

depth (anytree.node.nodemixin.NodeMixin attribute), 14  
descendants (anytree.node.nodemixin.NodeMixin attribute), 13  
DictExporter (class in anytree.exporter.dictexporter), 33  
DictImporter (class in anytree.importer.dictimporter), 31  
DotExporter (class in anytree.exporter.dotexporter), 35  
DoubleStyle (class in anytree.render), 21

## E

empty (anytree.render.AbstractStyle attribute), 20  
export() (anytree.exporter.dictexporter.DictExporter method), 34  
export() (anytree.exporter.jsonexporter.JsonExporter method), 35

## F

fill (anytree.render.Row attribute), 19  
find() (in module anytree.search), 25  
find\_by\_attr() (in module anytree.search), 25  
findall() (in module anytree.search), 23  
findall\_by\_attr() (in module anytree.search), 24

## G

get() (anytree.resolver.Resolver method), 26  
glob() (anytree.resolver.Resolver method), 27

## H

height (anytree.node.nodemixin.NodeMixin attribute), 14

## I

import\_() (anytree.importer.dictimporter.DictImporter method), 31  
import\_() (anytree.importer.jsonimporter.JsonImporter method), 32  
is\_leaf (anytree.node.nodemixin.NodeMixin attribute), 13  
is\_root (anytree.node.nodemixin.NodeMixin attribute), 14

is\_wildcard() (anytree.resolver.Resolver static method), 28

write() (anytree.exporter.jsonexporter.JsonExporter method), 35

## J

JsonExporter (class in anytree.exporter.jsonexporter), 34

JsonImporter (class in anytree.importer.jsonimporter), 32

## Z

ZigZagGroupIter (class in anytree.iterators.zigzaggroupiter), 18

## L

LevelOrderGroupIter (class in anytree.iterators.levelordergroupiter), 17

LevelOrderIter (class in anytree.iterators.levelorderiter), 16

LoopError, 14

## N

node (anytree.render.Row attribute), 19

Node (class in anytree.node.node), 10

NodeMixin (class in anytree.node.nodemixin), 10

## P

parent (anytree.node.nodemixin.NodeMixin attribute), 11

path (anytree.node.nodemixin.NodeMixin attribute), 12

PostOrderIter (class in anytree.iterators.postorderiter), 16

pre (anytree.render.Row attribute), 19

PreOrderIter (class in anytree.iterators.preorderiter), 15

## R

read() (anytree.importer.jsonimporter.JsonImporter method), 32

RenderTree (class in anytree.render), 21

Resolver (class in anytree.resolver), 26

ResolverError, 28

root (anytree.node.nodemixin.NodeMixin attribute), 13

Row (class in anytree.render), 19

## S

separator (anytree.node.nodemixin.NodeMixin attribute), 10

siblings (anytree.node.nodemixin.NodeMixin attribute), 13

## T

to\_dotfile() (anytree.exporter.dotexporter.DotExporter method), 37

to\_picture() (anytree.exporter.dotexporter.DotExporter method), 37

TreeError, 14

## W

walk() (anytree.walker.Walker method), 28

Walker (class in anytree.walker), 28

WalkError, 29